

GENERAL NOTES

ALL WORK SHALL CONFORM TO THE REQUIREMENTS OF THE CURRENT BUILDING CODES AND REGULATIONS OF THE COUNTY OF SAN LUIS OBISPO. CURRENT BUILDING CODES INCLUDE:
 1994 UNIFORM BUILDING CODE
 1994 UNIFORM MECHANICAL CODE
 1994 UNIFORM PLUMBING CODE
 1993 NATIONAL ELECTRICAL CODE
 TITLE 19 COUNTY BUILDING AND CONSTRUCTION ORDINANCE

ALL WORK DESCRIBED HEREIN SHALL BE VERIFIED FOR DIMENSION, GRADE, EXTENT, COMPATIBILITY, AND RELATIONSHIP TO EXISTING SITE, BUILDING AND SYSTEM CONDITIONS. DISCREPANCIES AND UNEXPECTED CONDITIONS THAT AFFECT OR PREVENT THE IMPLEMENTATION OF THE WORK SHALL BE BROUGHT TO THE ARCHITECT'S ATTENTION IMMEDIATELY. DO NOT PROCEED WITH THE WORK IN AREAS OF DISCREPANCIES UNTIL ALL SUCH DISCREPANCIES HAVE BEEN RESOLVED.

CONTRACTORS WHO INTEND TO PROVIDE SERVICES ON THIS PROJECT SHALL VISIT THE SITE AND MAKE THEMSELVES COMPLETELY FAMILIAR WITH THE EXISTING CONDITIONS PRIOR TO PROVIDING PROPOSALS FOR THE WORK.

COORDINATION WITH SOUTH BAY FIRE DEPARTMENT ON THIS PROJECT IS IMPERATIVE. COORDINATION SHALL INCLUDE 48 HOUR NOTICE OF WORK TO BE PERFORMED. MAINTENANCE OF EXISTING BUILDING SYSTEMS DURING THE PERFORMANCE OF THE WORK AND COORDINATION OF MOVING FIXTURES (SBFD WILL PROVIDE LABOR FOR MOVING FURNITURE AND EQUIPMENT). A SCHEDULE OF WORK SHALL BE PREPARED AND COORDINATED WITH SBFD.

REMOVE ALL RUBBISH, SCRAP AND DEMOLISHED ITEMS FROM THE SITE AND DISPOSE OF AT PROPER LOCATIONS. RUBBISH SHALL NOT BE ALLOWED TO ACCUMULATE. CONTRACTORS SHALL REMOVE ANY DEBRIS CREATED BY THEIR WORK AND LEAVE AREAS THEY ARE WORKING AT IN VACUUM CLEAN CONDITION AT THE END OF THE DAY. CONTROL MEASURES SHALL BE TAKEN TO PREVENT DUST FROM MIGRATING INTO AREAS WHERE WORK IS NOT BEING PERFORMED AT THE TIME.

HOLES, SCRATCHES AND / OR CRACKS CREATED DURING THE PERFORMANCE OF THE WORK SHALL BE REPAIRED BY THE CONTRACTOR.

ANY ACTIVE PIPES, CONDUITS, WIRING, PLUMBING ETC. TO BE WORKED ON OR BE RELOCATED AND WHICH ARE ESSENTIAL TO THE OPERATION OF THE PREMISES SHALL BE PROMPTLY RELOCATED OR BROUGHT BACK INTO SERVICE AND MAINTAINED AT ALL TIMES.

TR
THOMAS REAY ARCHITECT
 780 CAUDILL STREET
 SAN LUIS OBISPO
 CALIFORNIA 93401
 (805) 545-8435

LICENSED ARCHITECT
 THOMAS GEORGE REAY
 C-19442
 EXPIRES 1/1/2010
 STATE OF CALIFORNIA

PROJECT:
SOUTH BAY FIRE DEPARTMENT FIRE STATION IMPROVEMENTS
 2315 BAYVIEW HEIGHTS DRIVE
 LOS OSOS, CALIFORNIA

BRUCE PICKENS FIRE CHIEF

CONTACT
JOHN FORSBERG
 PROJECT COORDINATOR


LOS OSOS COMMUNITY SERVICE DISTRICT
 2315 BAYVIEW HEIGHTS DRIVE
 LOS OSOS, CALIFORNIA 93402
 805/528-1053

FIRE STATION FLOOR PLAN
 SCALE: 3/16" = 1'-0"

FLOORING TYPE	DESCRIPTION
FLOORING TYPE A	*COLLINS 4 AIKMAN* COMMERCIAL GRADE CARPET PROVIDED BY COUNTY, INSTALLED BY GENERAL CONTRACTOR. REMOVE AND DISPOSE OF EXISTING CARPET. PREPARE ALL SURFACES AS REQUIRED BY MANUFACTURER AND GLUE DOWN NEW CARPET. PROVIDE 6" HIGH CARPET BASE AT ALL WALLS WITH SILVER FINISH J METAL AT TOP.
FLOORING TYPE B	*COLLINS 4 AIKMAN* COMMERCIAL GRADE CARPET PROVIDED BY COUNTY, INSTALLED BY GENERAL CONTRACTOR. REMOVE AND DISPOSE OF EXISTING CARPET. INSTALL CARPET OVER EXISTING VINYL TILE FLOORING. NOTIFY SBFD OF ANY LOOSE TILES. (LOOSE TILES SHALL BE REMOVED AND DISPOSED BY SBFD). PREPARE ALL SURFACES AS REQUIRED BY MANUFACTURER AND GLUE DOWN NEW CARPET. PROVIDE 4" HIGH CARPET BASE AT ALL WALLS WITH SILVER FINISH J METAL AT TOP.
FLOORING TYPE C	*COLLINS 4 AIKMAN* COMMERCIAL GRADE CARPET PROVIDED BY COUNTY, INSTALLED BY GENERAL CONTRACTOR. INSTALL CARPET OVER EXISTING VINYL TILE FLOORING. NOTIFY SBFD OF ANY LOOSE TILES. (LOOSE TILES SHALL BE REMOVED AND DISPOSED BY SBFD). PREPARE ALL SURFACES AS REQUIRED BY MANUFACTURER AND GLUE DOWN NEW CARPET. PROVIDE 4" HIGH CARPET BASE AT ALL WALLS WITH SILVER FINISH J METAL AT TOP.
FLOORING TYPE D	NEW 12" X 12" "ESSENZA" BLUE PEAK PORCELAIN UNPOLISHED TILE PAVERS ON THIN SET BASE. PROVIDE 1/4" GROUT JOINTS WITH UNSANDED GRAY GROUT (COLOR TO BE SELECTED BY SBFD). PROVIDE 4" HIGH BASE CUT FROM TILE MATERIAL AT ALL WALLS. REMOVE AND DISPOSE OF EXISTING CARPET.
FLOORING TYPE E	NEW 12" X 12" "ESSENZA" BLUE PEAK PORCELAIN UNPOLISHED TILE PAVERS ON THIN SET BASE. PROVIDE 1/4" GROUT JOINTS WITH UNSANDED GRAY GROUT (COLOR TO BE SELECTED BY SBFD). PROVIDE 4" HIGH BASE CUT FROM TILE MATERIAL AT ALL WALLS. SET TILE OVER EXISTING VINYL TILE FLOORING.
FLOORING TYPE F	NEW 12" X 12" "ESSENZA" BLUE PEAK PORCELAIN UNPOLISHED TILE PAVERS ON THIN SET BASE. PROVIDE 1/4" GROUT JOINTS WITH UNSANDED GRAY GROUT (COLOR TO BE SELECTED BY SBFD). PROVIDE 4" HIGH BASE CUT FROM TILE MATERIAL AT ALL WALLS. REMOVE AND DISPOSE OF EXISTING TILE FLOORING.
FLOORING TYPE G	EXISTING FLOORING TO REMAIN.

- PROJECT TASKS AND REFERENCE NOTES**
- NEW 2x6 WOOD FRAMED WEATHER WALL AT REAR OF BUILDING PER ENLARGED PLANS AND SECTIONS.
 - REMOVE EXISTING CONCRETE AND PROVIDE RAMP TO DOOR NOT EXCEEDING 1 IN 20 VERTICAL TO HORIZONTAL.
 - LEVEL LANDING AT DOOR TO BE LESS THAN 1/2 BELOW TOP OF THRESHOLD AT EXIT DOOR.
 - NEW 3 1/2" WIDE 20 GA. METAL STUD FRAMING AT 16" O.C. MAXIMUM. PROVIDE POWDER ACTUATED ANCHORS AT CONCRETE SLAB. PROVIDE 2x4 BACKING AT 24" O.C. BETWEEN CEILING JOISTS ABOVE FOR ATTACHMENT OF TOP CHANNELS. EXISTING ACOUSTIC CEILING IS TO REMAIN. PROVIDE 1/2" GYPSUM BOARD BOTH SIDES WITH SMOOTH FINISH TO MATCH EXISTING WALLS.
 - PROVIDE GYPSUM BOARD FINISH AT EXPOSED RETURN AT WINDOW.
 - NEW PAIR 3'-0" X 7'-6" X 1 3/8 HOLLOW CORE PAINT GRADE DOORS WITH CASING TO MATCH EXISTING FIRE STATION CASING. PROVIDE BALL CATCH HARDWARE AND WIRE PULLS TO MATCH KITCHEN PULLS.
 - 18" DEEP SHELF ABOVE.
 - ADJUSTABLE BOOKSHELVES.
 - NEW BASE CABINET WITH PAINT GRADE TOP.
 - REMOVE EXISTING UPPER CABINET IN THIS LOCATION.
 - NEW 28" DEEP PANTRY WITH 4" BASE AND KICK.
 - NEW RECYCLING STORAGE CABINETS WITHOUT BASES. CONTINUE TILE FLOORING INSIDE CABINET.
 - NEW *CORIAN* TOPS AND SPLASHES PER INTERIOR ELEVATIONS, SHEET A.2.
 - EXISTING UPPER AND BASE CABINETS, OVENS AND HOODS TO BE REMOVED AND DISPOSED OF BY GENERAL CONTRACTOR. GAS LINES ARE TO BE CAPPED AT EAST WALL.
 - NEW *VIKING* 48" GAS CONVECTION DOUBLE OVEN / RANGE MODEL #VGR485-4GD PROVIDED BY COUNTY, INSTALLED BY GENERAL CONTRACTOR. PROVIDE 1/2" GAS LINE FROM ATTIC IN NEW STUD WALL.
 - NEW *VENTAHOOD* 48" 1200 CFM "PROLINE" EXHAUST HOOD PROVIDED BY COUNTY, INSTALLED BY GENERAL CONTRACTOR.

- NEW 2x4 WOOD STUD FRAMED WALL BEHIND NEW OVEN WITH 5/8" GYPSUM BOARD ALL SIDES. PROVIDE STAINLESS STEEL TOP FROM TOP OF BASE TO CEILING ON OVEN SIDE OF WALL AND BOTH RETURNS. REFER TO INTERIOR ELEVATION 5.2 / A.2.
- NEW REFRIGERATOR SPACE LOCATION. (SPACE IS FOR UP TO THREE FULL SIZE REFRIGERATORS). CONTINUE NEW TILE FLOORING AND BASE TO WALL.
- WATER BOTTLE STORAGE CABINET. PROVIDE 4" BASE.
- 12" DEEP CABINET. PROVIDE 4" BASE.
- EXISTING DISHWASHER TO REMAIN. CONTINUE NEW TILE FLOORING UNDER DISHWASHER. EXISTING TOP SET STAINLESS STEEL SINK TO BE REUSED IN THIS LOCATION. REFER TO INTERIOR ELEVATIONS, SHEET A.2 FOR NEW FAUCET.
- PROVIDE 1/2" *CORIAN* SHELF AT WINDOW SILLS IN KITCHEN.
- NEW TRASH CAN SPACE TO BE PROVIDED AT SECTION OF CABINET EXPOSED WHEN EXISTING CABINET IS REMOVED. CONTINUE NEW TILE FLOORING AND BASE TO WALL.
- REMOVE EXISTING PLASTIC LAMINATE COUNTER AND PROVIDE NEW 1/2" *CORIAN* COUNTER TOP AND 4" HIGH SPLASH AT BATHROOM LAVATORY.
- NEW ENTERTAINMENT CABINET PER INTERIOR ELEVATION 3.2/A.2.
- EXISTING PAINTING ON THIS WALL TO REMAIN.
- THIS CABINET IS TO RECEIVE NEW 1/2" *CORIAN* COUNTER TOP AND 4" HIGH SPLASH.
- PROVIDE NEW 1/2" *CORIAN* CAP OVER 3/4" AC GRADE PLYWOOD WITH 1 1/2" DEEP NOSINGS OVER EXISTING METAL FILE CABINETS. VERIFY EXACT DIMENSIONS OF CABINETS PRIOR TO FABRICATION.
- EXISTING CABINET TO REMAIN AS IS.
- REMOVE EXISTING TOP SET STAINLESS STEEL SINK THIS LOCATION. REFER TO INTERIOR ELEVATIONS, SHEET A.2 FOR NEW SINK AND FAUCET SPECIFICATIONS.
- STEEL PIPE BOLLARDS PER DETAIL 4.2/A.3 (THREE TOTAL).
- PROVIDE TWO RECESSED COMPACT FLUORESCENT LIGHT FIXTURES APPROVED FOR EXTERIOR LOCATIONS IN CEILING OF NEW WIND WALL ROOF. CONNECT FIXTURES TO EXISTING PHOTOCELL CIRCUIT.

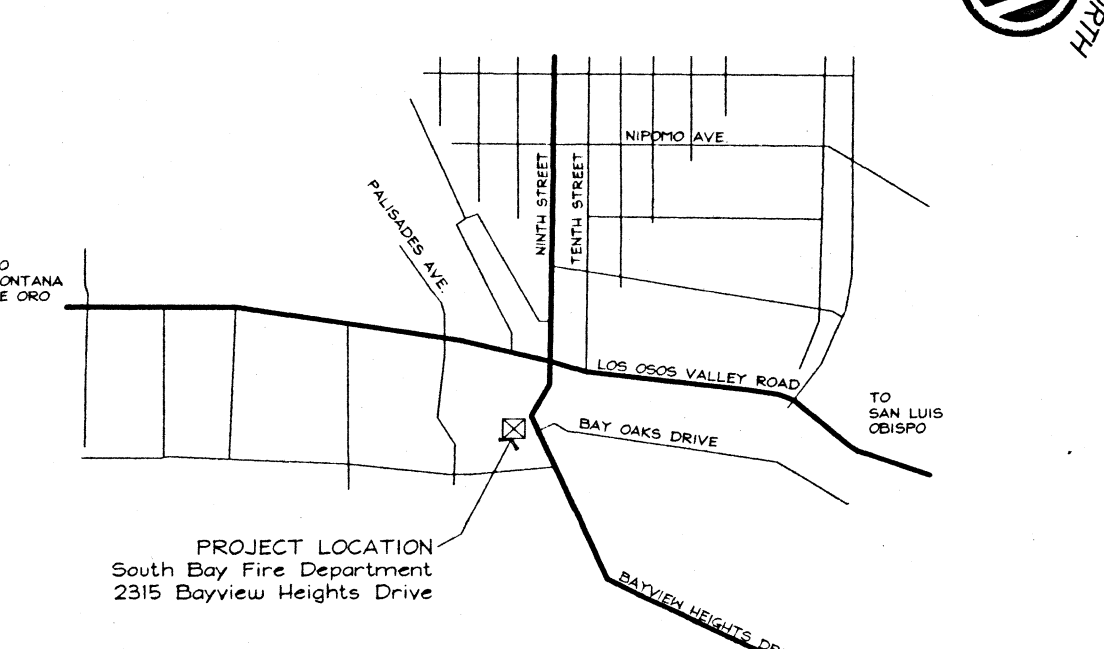

INDEX


A.1	FLOOR PLAN
A.2	INTERIOR ELEVATIONS
A.3	WIND WALL

VICINITY MAP / INDEX

All designs and other information on these drawings are for use on this specific project and shall not be used otherwise without the express written permission of Thomas Reay Architect.

Written dimensions on these drawings shall take precedence over scaled dimensions. Contractors shall verify and be responsible for all dimensions and conditions on this job and this office shall be notified in writing of any violations from the dimensions or conditions shown in these drawings.

PROJECT NUMBER: 9820
 DATE: MARCH 1999
 SHEET TITLE:
FLOOR PLAN
 SHEET NUMBER:

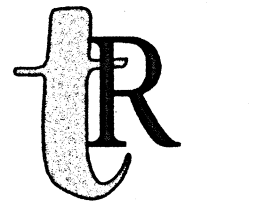


THOMAS REAY ARCHITECT

780 CAUDILL STREET

SAN LUIS OBISPO

CALIFORNIA 93401

(805) 545-8435

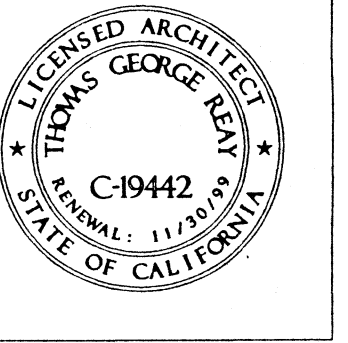

PROJECT: SOUTH BAY FIRE DEPARTMENT FIRE STATION IMPROVEMENTS

2315 BAYVIEW HEIGHTS DRIVE LOS OSOS, CALIFORNIA

BRUCE PICKENS FIRE CHIEF

CONTACT JOHN FORSBERG PROJECT COORDINATOR

LOS OSOS COMMUNITY SERVICE DISTRICT

2315 BAYVIEW HEIGHTS DRIVE LOS OSOS, CALIFORNIA 93402 805 / 528 - 1053


PROJECT NUMBER: 9820

DATE: MARCH 1999

SHEET TITLE: INTERIOR ELEVATIONS


SHEET NUMBER:

A.2

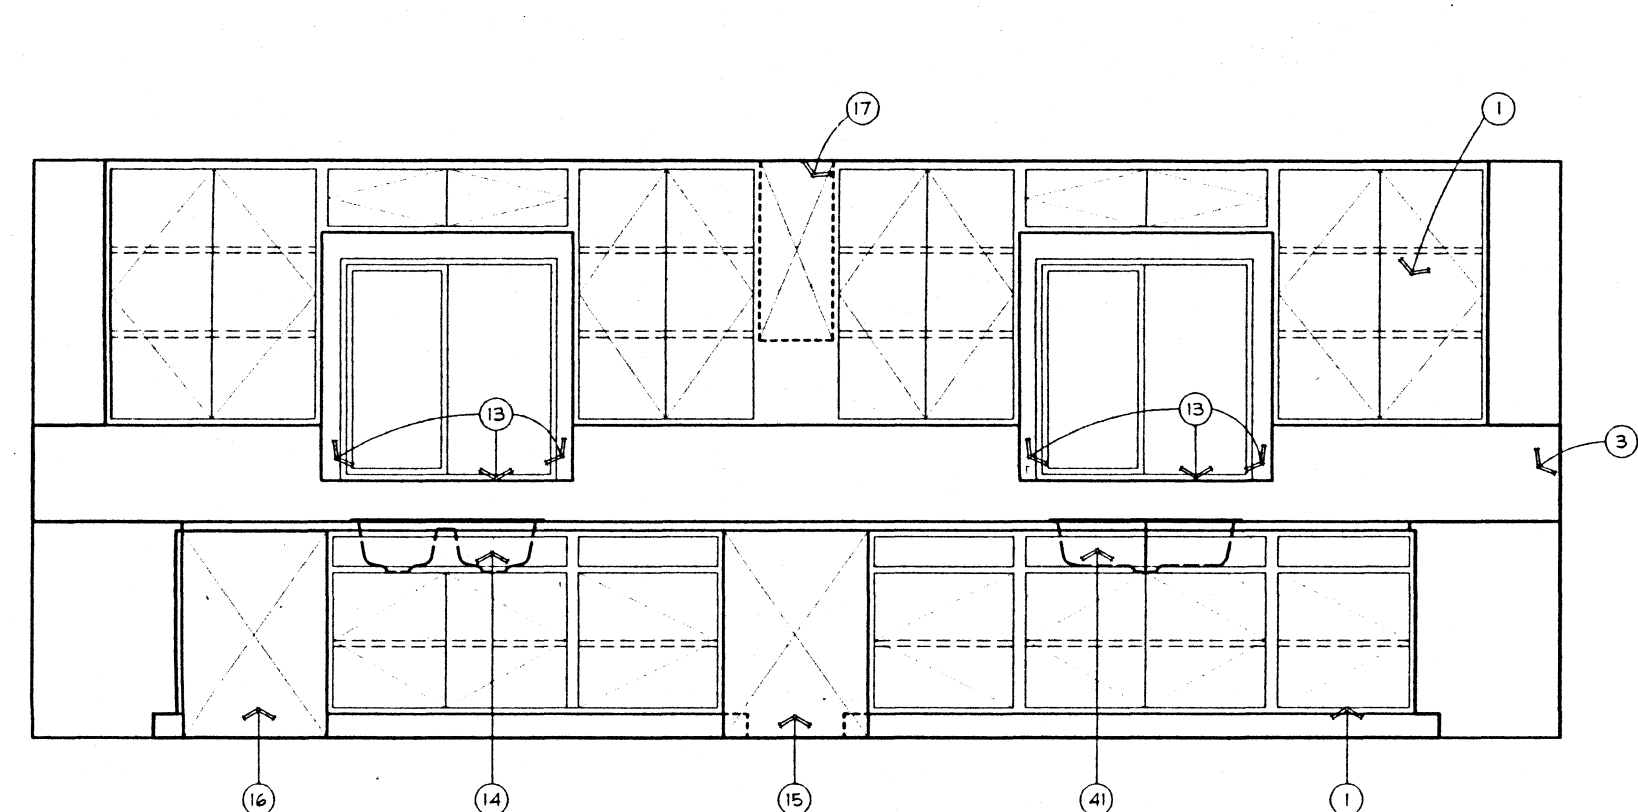


KITCHEN SOUTH WALL
3/8" = 1'-0"

4.1

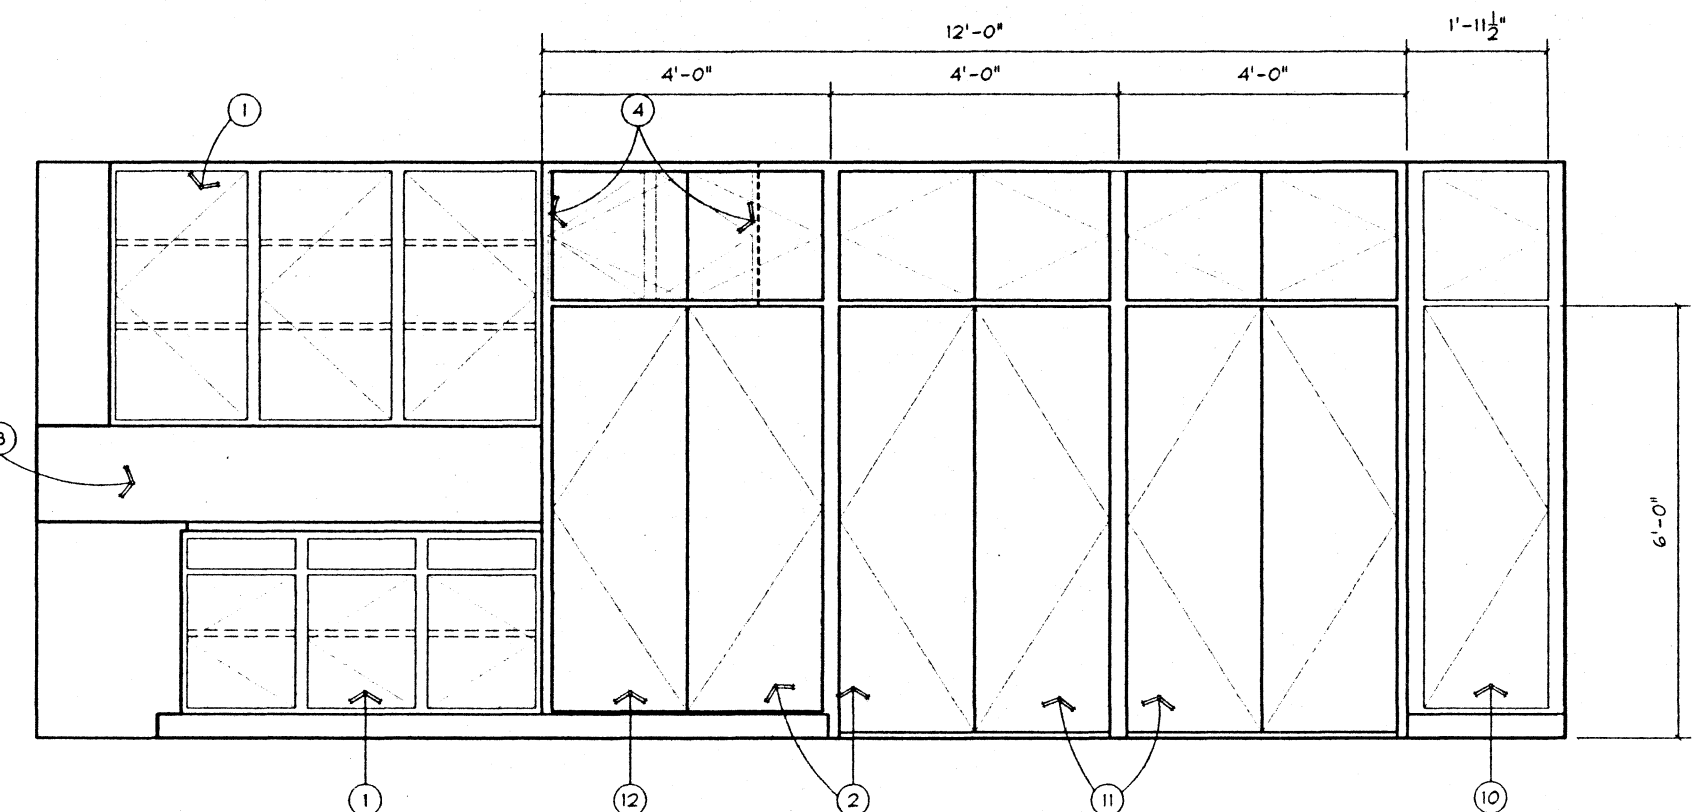


KITCHEN WEST WALL
3/8" = 1'-0"

3.1

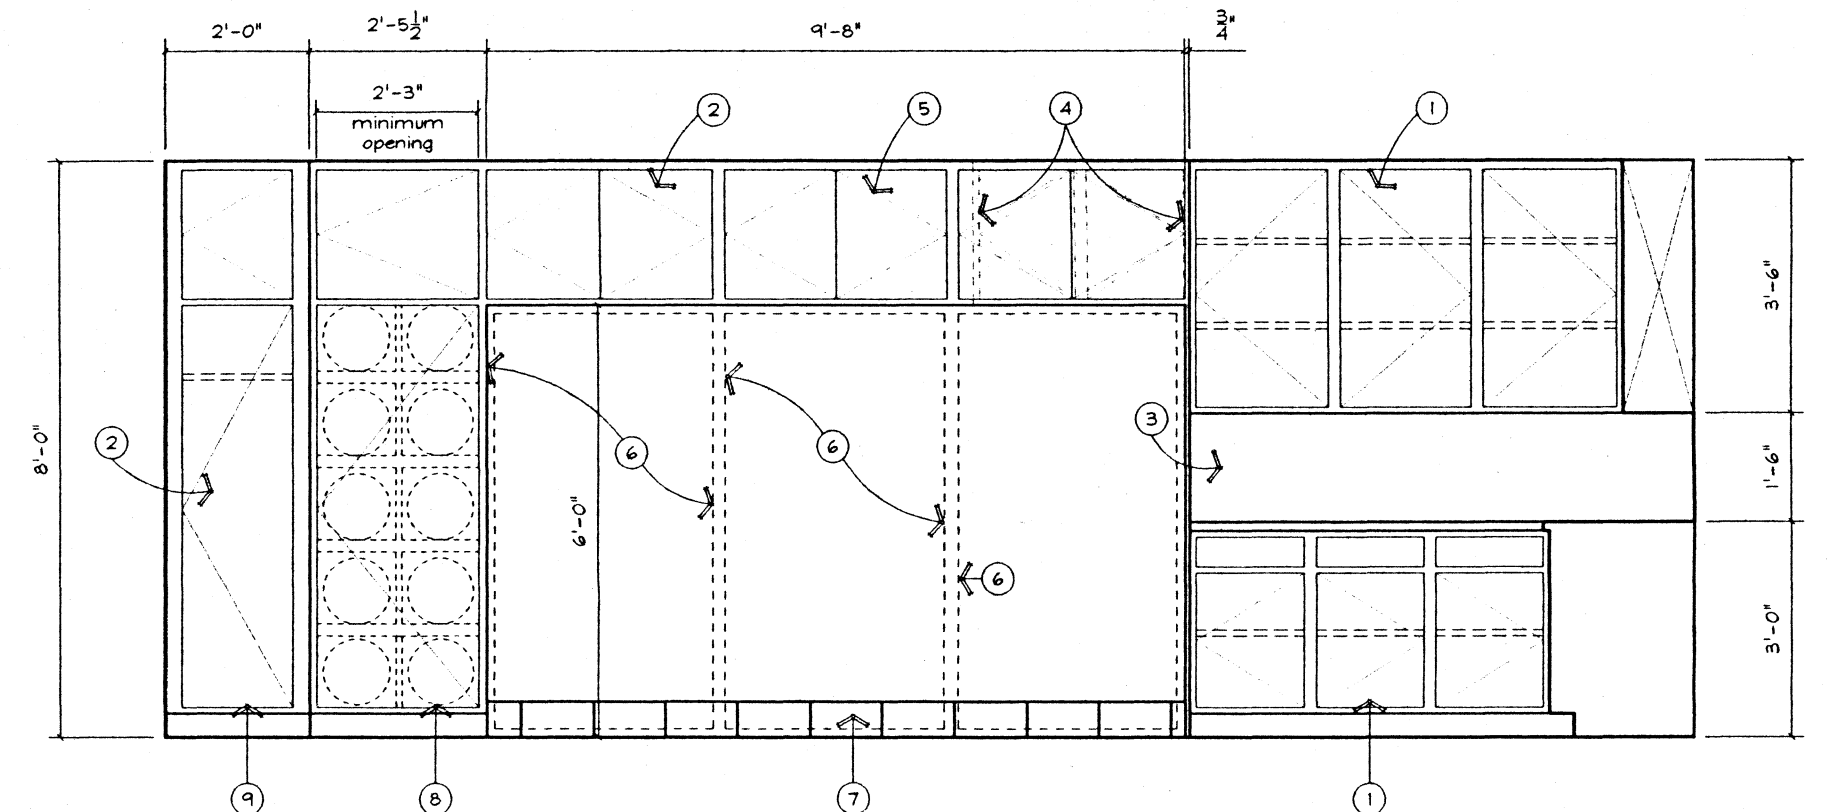


KITCHEN EAST WALL
3/8" = 1'-0"

1.1

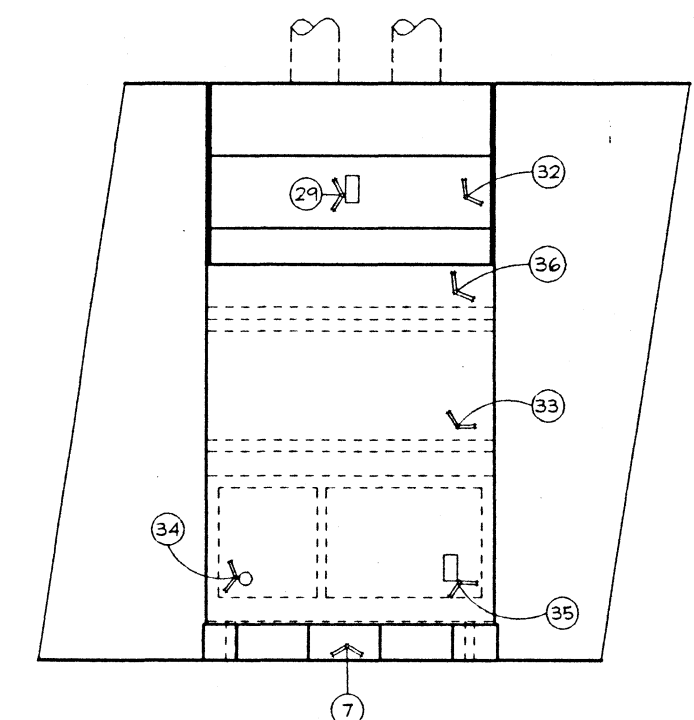


KITCHEN RANGE WALL
3/8" = 1'-0"

5.2

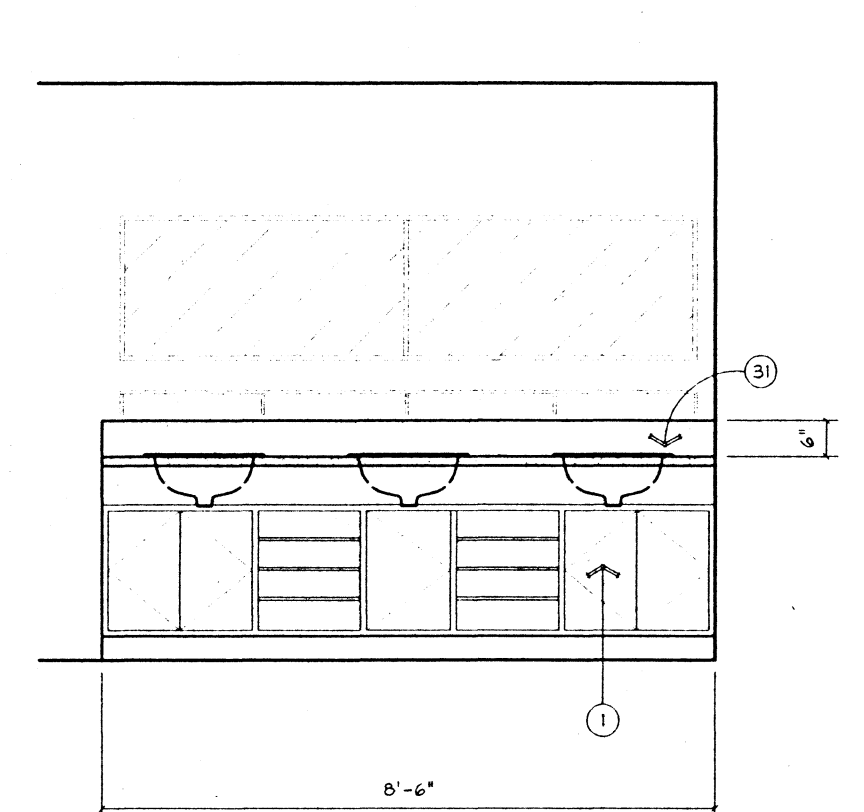


BATHROOM WEST WALL
3/8" = 1'-0"

4.2

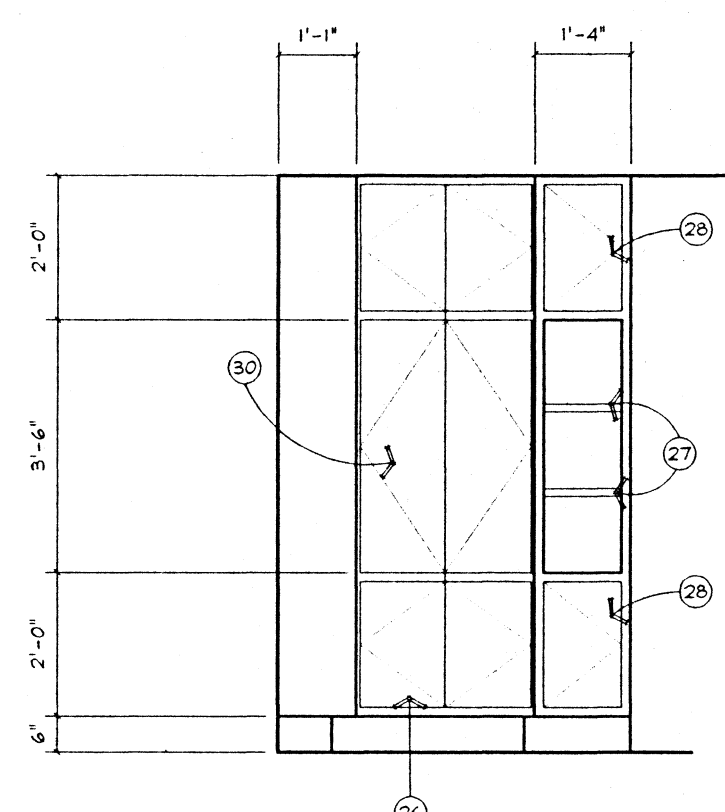


RECREATION ROOM CABINET
3/8" = 1'-0"

3.2

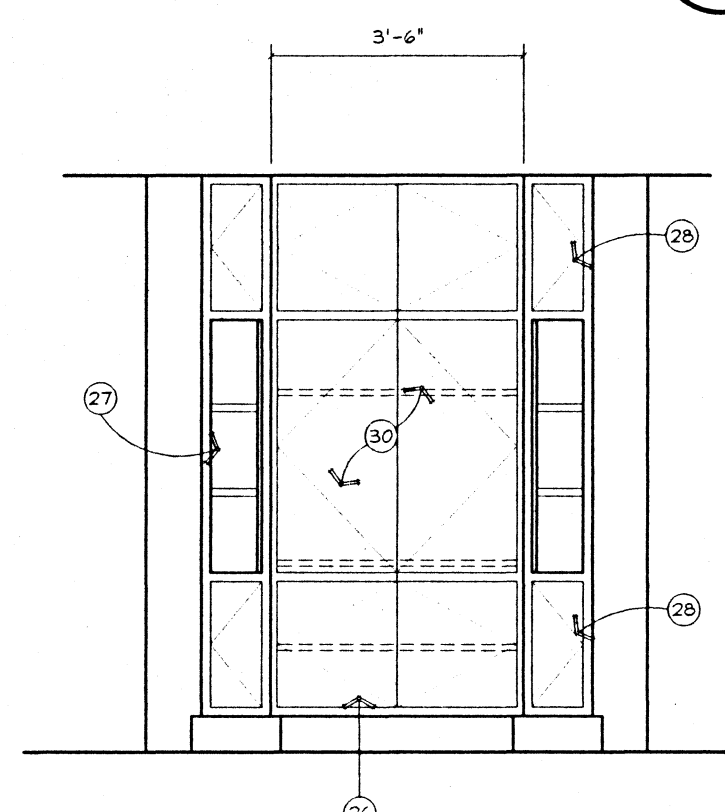


TRAINING ROOM WEST WALL
3/8" = 1'-0"

1.2

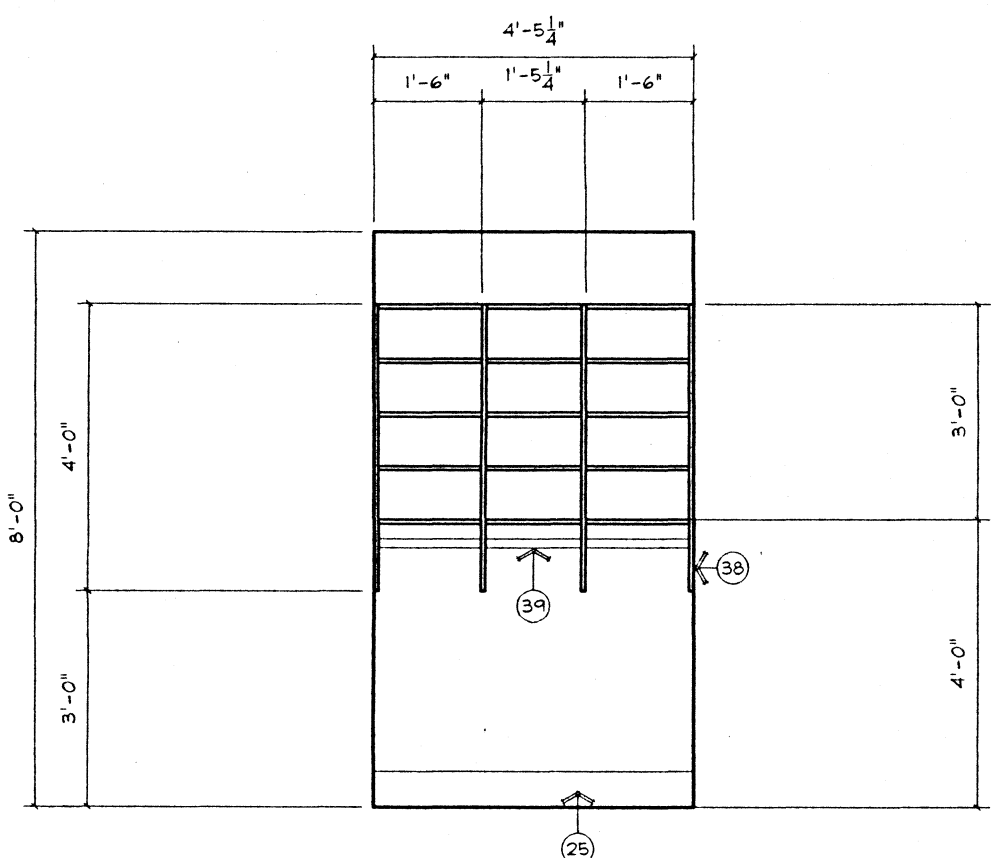


CAPTAIN'S CLOSET
3/8" = 1'-0"

5.3

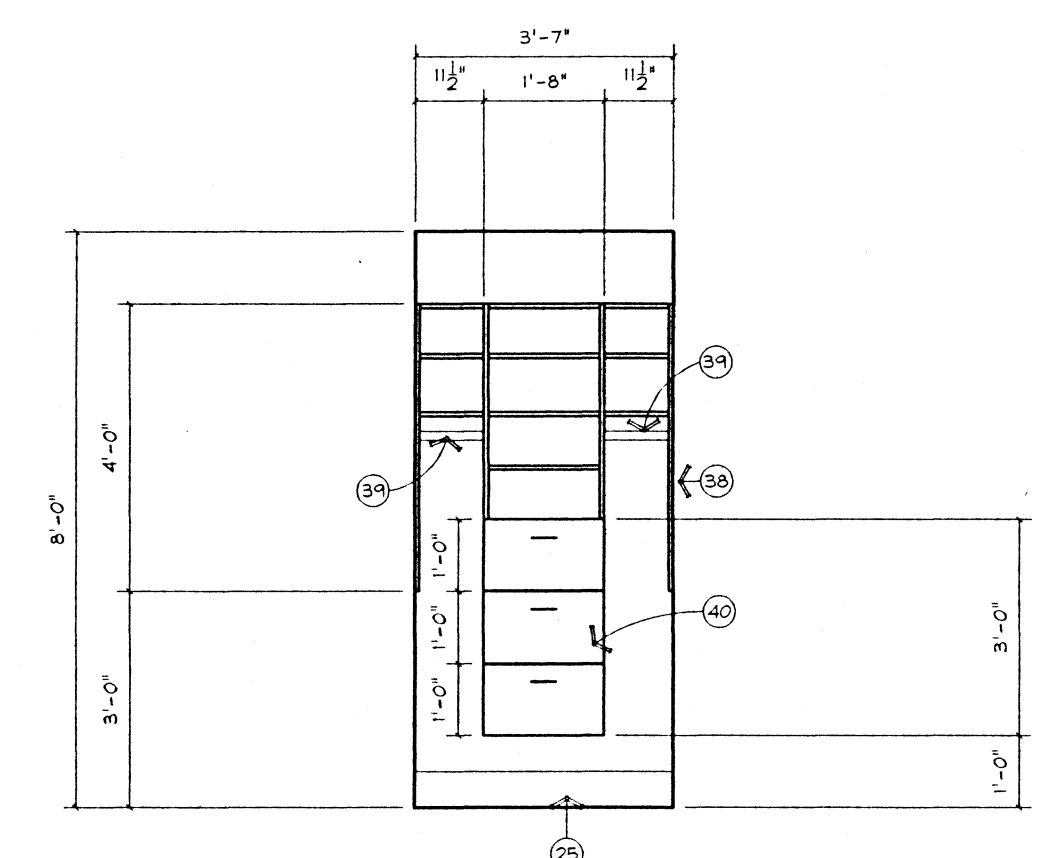


ENGINEER'S LEFT CLOSET
3/8" = 1'-0"

4.3

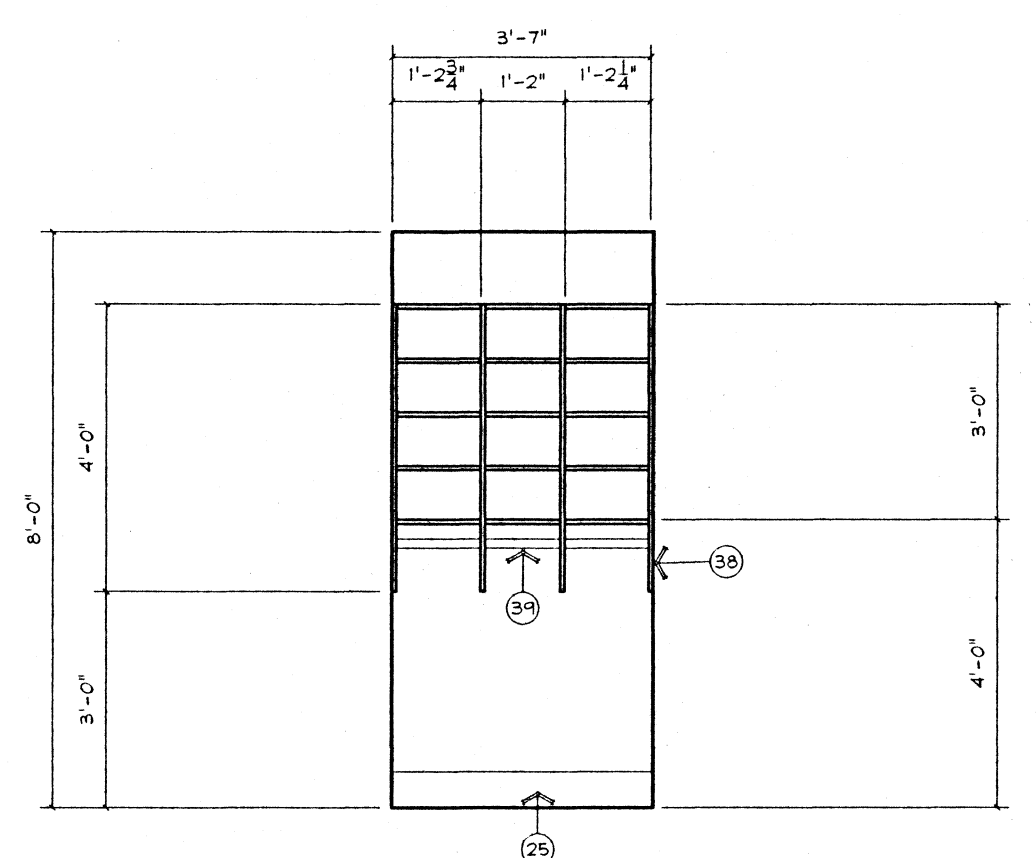


ENGINEER'S RIGHT CLOSET
3/8" = 1'-0"

3.3

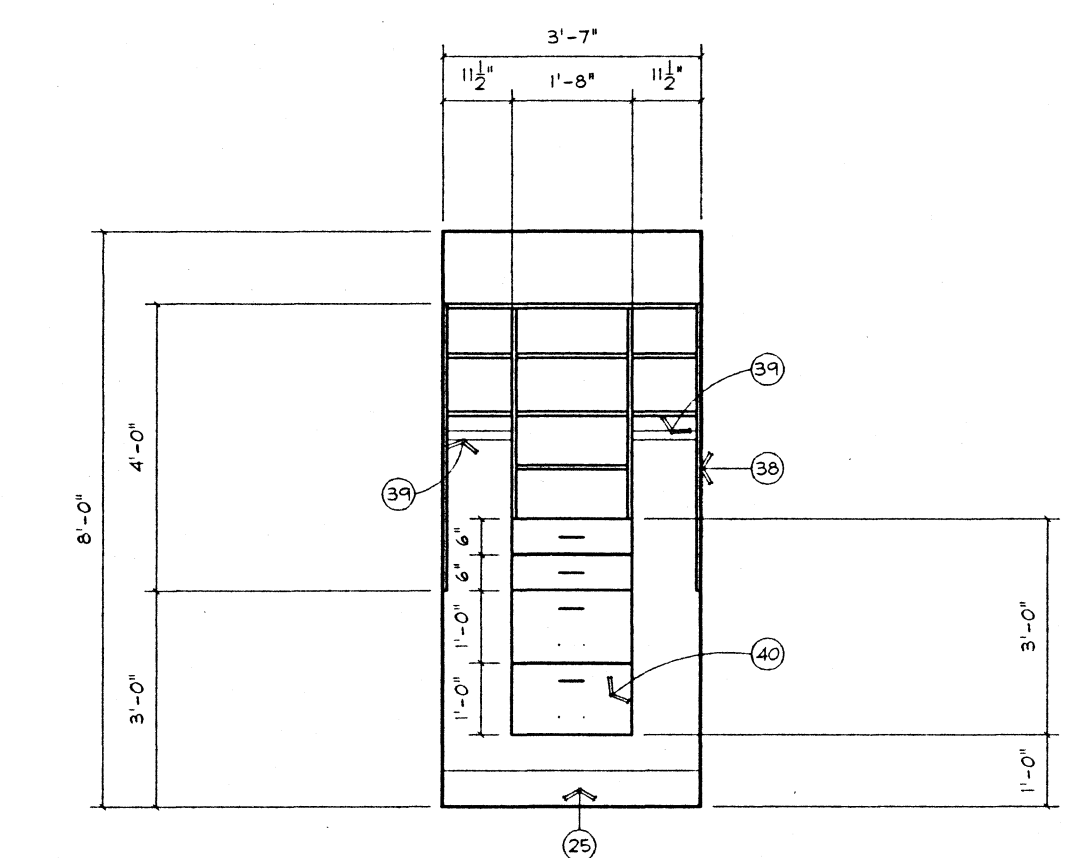


DORMITORY LEFT CLOSET
3/8" = 1'-0"

2.3

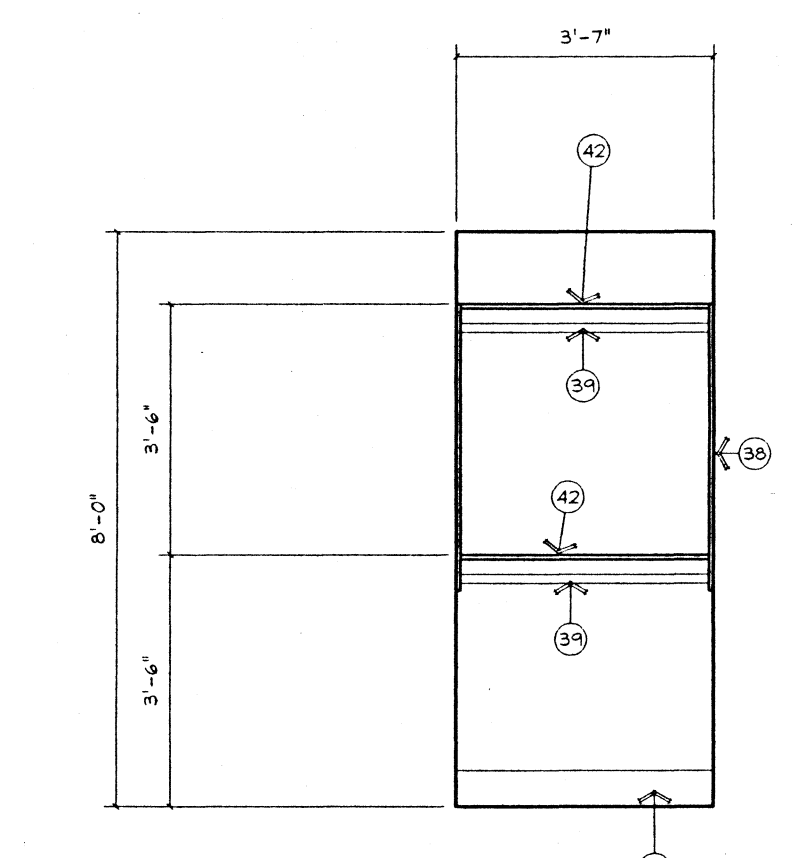

DORMITORY RIGHT CLOSET
3/8" = 1'-0"

1.3

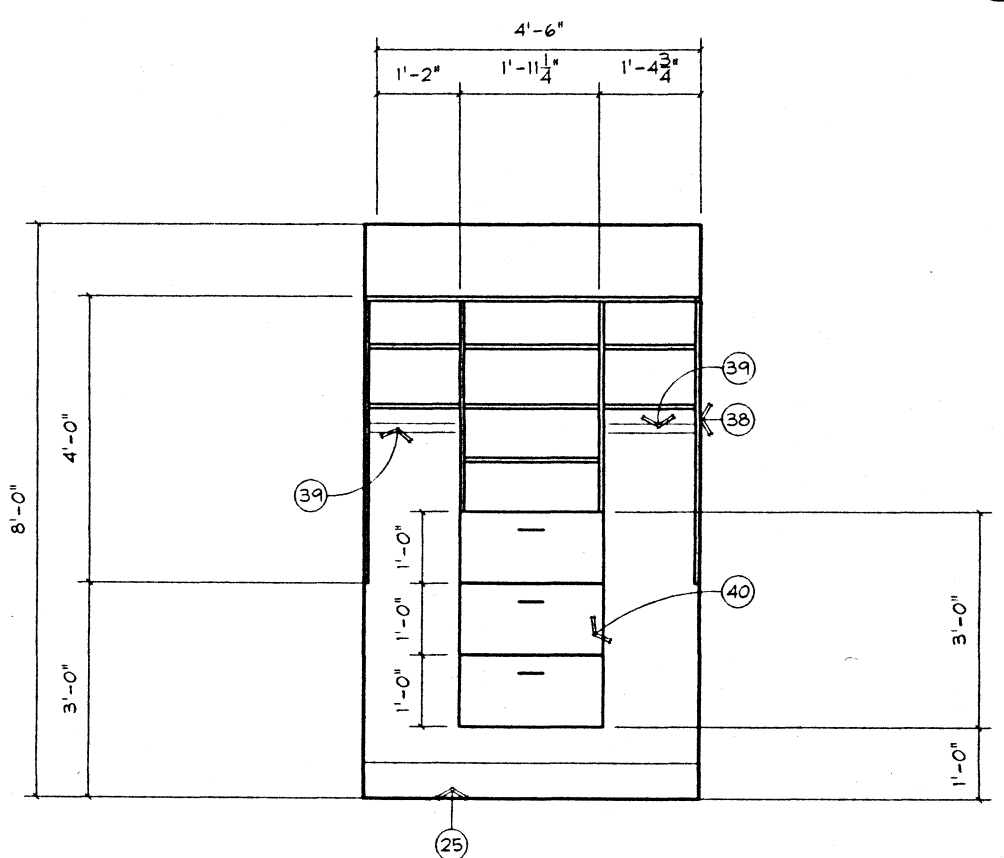

HALL CLOSET
3/8" = 1'-0"

5.4

FINISH NOTES

4.4

INTERIOR ELEVATION REFERENCE NOTES

19

- EXISTING CABINETS
PREPARE EXISTING SURFACES AS PER PAINT MANUFACTURER'S REQUIREMENTS, INCLUDING DEGREASING AS NECESSARY. PRIME WITH ONE COAT "FRAZIE" 160 PRIME-PLUS WATER BASED BONDING PRIMER. FINAL COAT TO BE "FRAZIE" MIRRO GLIDE GLOSS ACRYLIC. VERIFY COLOR WITH SDFD.
- NEW CABINETS
PREPARE NEW SURFACES AS PER PAINT MANUFACTURER'S REQUIREMENTS. PRIME WITH TWO COATS "FRAZIE" 160 PRIME-PLUS WATER BASED BONDING PRIMER. PROVIDE INTERMEDIATE SANDING. FINAL COAT TO BE "FRAZIE" MIRRO GLIDE GLOSS ACRYLIC. VERIFY COLOR WITH SDFD.
- EXISTING DOORS, CASING AND TRIM
PREPARE EXISTING SURFACES AS PER PAINT MANUFACTURER'S REQUIREMENTS, INCLUDING SANDING AND FILLING AS NECESSARY TO PROVIDE SMOOTH FINAL SURFACE. PRIME WITH ONE COAT "FRAZIE" 160 PRIME-PLUS WATER BASED BONDING PRIMER. FINAL COAT TO BE "FRAZIE" MIRRO GLIDE GLOSS ACRYLIC. VERIFY COLOR WITH SDFD.
- NEW DOORS, CASING AND TRIM
PREPARE NEW SURFACES AS PER PAINT MANUFACTURER'S REQUIREMENTS. PRIME WITH TWO COATS "FRAZIE" 160 PRIME-PLUS WATER BASED BONDING PRIMER. PROVIDE INTERMEDIATE SANDING. FINAL COAT TO BE "FRAZIE" MIRRO GLIDE GLOSS ACRYLIC. VERIFY COLOR WITH SDFD.
- INTERIOR WALLS
TOUCH-UP AND MINOR INTERIOR PAINTING TO BE PROVIDED BY SDFD PERSONNEL. GENERAL CONTRACTOR SHALL PROVIDE TOUCH-UP PAINTING WHERE REQUIRED AS A RESULT OF WORK PERFORMED BY THE CONTRACTOR.
- STUCCO AT WIND WALL
PRIME STUCCO WITH "FRAZIE" 240 EPOLITE EXTERIOR EPOXY-ACRYLIC CONCRETE SEALER AFTER PROPER CURING TIME. FINAL COAT PAINT MATERIAL IS TO BE SUPPLIED BY SDFD.


- EXISTING CABINETS TO REMAIN AND BE REFINISHED PER FINISH NOTES, 4.4/2. PROVIDE NEW BRUSHED CHROME HARDWARE AND WIRE PULLS AND ALL DOORS AND DRAWERS. DASHED LINES INDICATE FIXED SHELVES.
- NEW FACE FRAME PAINT GRADE CABINETS TO MATCH EXISTING. PROVIDE SEALED A GRADE PLYWOOD INTERIORS. NEW DOORS SHALL BE "DECORATIVE SPECIALTIES" FLAIR STYLE, HOLLOW CORE DOORS. PROVIDE BRUSHED CHROME HARDWARE AND WIRE PULLS. FINISH PER FINISH NOTES, 4.4/2. DASHED LINES INDICATE FIXED SHELVES.
- REMOVE EXISTING PLASTIC LAMINATE COUNTER TOPS AND REPLACE WITH NEW 1/2" THICK "CORION" OVER 3/4" THICK PLYWOOD. PROVIDE 2" DEEP X 1/2" "CORION" NOSINGS AND 1/4" THICK, FULL HEIGHT "CORION" BACK SPLASHES FROM TOP OF COUNTER TO BOTTOM OF CABINETS. COLOR SHALL BE "SIERRA DUSK".
- REMOVE EXISTING UPPER CABINET.
- NEW 24" DEEP X 24" HIGH UPPER CABINETS OVER REFRIGERATOR SPACE.
- REFRIGERATOR SPACE FOR UP TO THREE FULL SIZE REFRIGERATORS. CONTINUE NEW TILE FLOORING TO EXISTING WALL AND PROVIDE TILE BASE.
- 4" HIGH TILE BASE.
- NEW 24" DEEP STORAGE CABINET FOR WATER BOTTLES.
- NEW 12" DEEP BROOM CLOSET.
- NEW 12" DEEP CABINET.
- 20" DEEP RECYCLING STORAGE CABINET. CONTINUE TILE FLOORING TO BACK WALL AND PROVIDE TYPICAL 6" BASE.
- PROVIDE 1/2" "CORION" SHELF AT WINDOW SILL WRAP BOTH SIDES TO THE TOP OF THE BACK SPLASH WITH 1/2" "CORION".

- EXISTING TOP SET STAINLESS STEEL SINK TO BE REUSED. PROVIDE NEW "CHICAGO" #200-317 FAUCET SET AND SPRAY.
- NEW TRASH CAN LOCATION. REMOVE EXISTING END PANEL AND KICK. FINISH INSIDE OF CABINET. CONTINUE TILE FLOORING TO WALL AND PROVIDE 4" BASE AT WALL.
- EXISTING DISHWASHER LOCATION. CONTINUE NEW TILE FLOORING UNDER DISHWASHER. LOCATION OF EXISTING UPPER CABINET TO BE REMOVED.
- NEW 3 1/2" WIDE 20 GA. METAL STUD FRAMING AT 16" O.C. MAXIMUM. PROVIDE POWER ACTUATED ANCHORS AT CONCRETE SLAB. PROVIDE 1/2" GYPSUM BOARD BOTH SIDES WITH SMOOTH FINISH TO MATCH EXISTING WALLS.
- PROVIDE GYPSUM BOARD FINISH AT EXPOSED RETURN AT WINDOW.
- NEW PAIR 3'-0" X 7'-6" X 1 3/8" HOLLOW CORE PAINT GRADE DOORS WITH CASING TO MATCH EXISTING FIRE STATION CASING. PROVIDE BALL CATCH HARDWARE AND WIRE PULLS TO MATCH KITCHEN PULLS.
- 10" DEEP SHELF ABOVE.
- (3) 14" DEEP BANNED MELAMINE ADJUSTABLE BOOKSHELVES WITH WITH BRACKETS ATTACHED TO EXISTING MASONRY WALL.
- PROVIDE 2X4 BACKING AT 24" O.C. BETWEEN CEILING JOISTS ABOVE FOR ATTACHMENT OF TOP CHANNELS. EXISTING ACOUSTIC CEILING IS TO REMAIN.
- NEW 6" HIGH CARPET BASE WITH BRUSHED CHROME "J" METAL AT TOP.
- NEW FACE FRAME, PAINT GRADE, ENTERTAINMENT CENTER CONSTRUCTED SIMILAR TO OTHER NEW CABINETS WITH SAME STYLE DOORS AND PULLS.
- OPEN BOOKSHELVES.

- CABINET DOORS.
- PROVIDE POWER FOR HOOD AS REQUIRED.
- RETRACTING POCKET DOORS AT TV AREA.
- REMOVE EXISTING PLASTIC LAMINATE COUNTERTOP AND SPLASH AND REPLACE WITH NEW 1/2" "CORION" COUNTER WITH 2" HIGH NOSING AND 6" BACK SPLASH. RE-USE EXISTING SINKS AND FAUCETS.
- NEW "VENTAWOOD" 48" 1200 CFM "PROLINE" EXHAUST HOOD PROVIDED BY COUNTY. INSTALLED BY GENERAL CONTRACTOR. PROVIDE TWO 6" DUCTS AND APPROVED TERMINATIONS, INCLUDING ROOF JACKS AT ROOF ABOVE.
- NEW "VIKING" 48" GAS CONVECTION DOUBLE OVEN / RANGE MODEL #VGR485-6GD PROVIDED BY COUNTY. INSTALLED BY GENERAL CONTRACTOR.
- PROVIDE 1/2" GAS LINE FROM ATTIC IN NEW METAL STUD WALL. PROVIDE APPROVED SHUT OFF VALVE.
- PROVIDE 120VAC, 60 Hz DUPLEX OUTLET. MAXIMUM OVEN AMPERAGE USAGE = 16.0 AMPS, VERIFY ROOM ON CIRCUIT PRIOR TO INSTALLATION.
- NEW 6" HIGH TILE BASE.
- 12" DEEP (TYPICAL, U.O.N.) BANNED WHITE MELAMINE CLOSET ORGANIZERS. REMOVE EXISTING SHELF AND POLES IN ALL CLOSETS. CLOSET SHELVES ARE TO BE FULLY ADJUSTABLE. VERIFY EXACT DIMENSIONS WITH SITE CONDITIONS AND SDFD.
- CHROME PLATED HANGER POLES, TYPICAL.
- 14" DEEP, 5" HIGH DRAWERS.
- PROVIDE NEW 31" X 22" X 12" DEEP SINGLE BOWL "ELKAY" DLR-3122-12 STAINLESS STEEL, TOOP SET SINK AND "CHICAGO" 3200-HAB-36A FAUCET WITH WHIST BLADE HANDLES.
- 12" DEEP SHELF.


All designs and other information on these drawings are for use on this specific project and shall not be used otherwise without the expressed written permission of Thomas Reay, Architect.

Written dimensions on these drawings shall take precedence over scaled dimensions. Contractors shall verify and be responsible for all dimensions and conditions on this job and this office shall be notified in writing of any variations from the dimensions or conditions shown in these drawings.

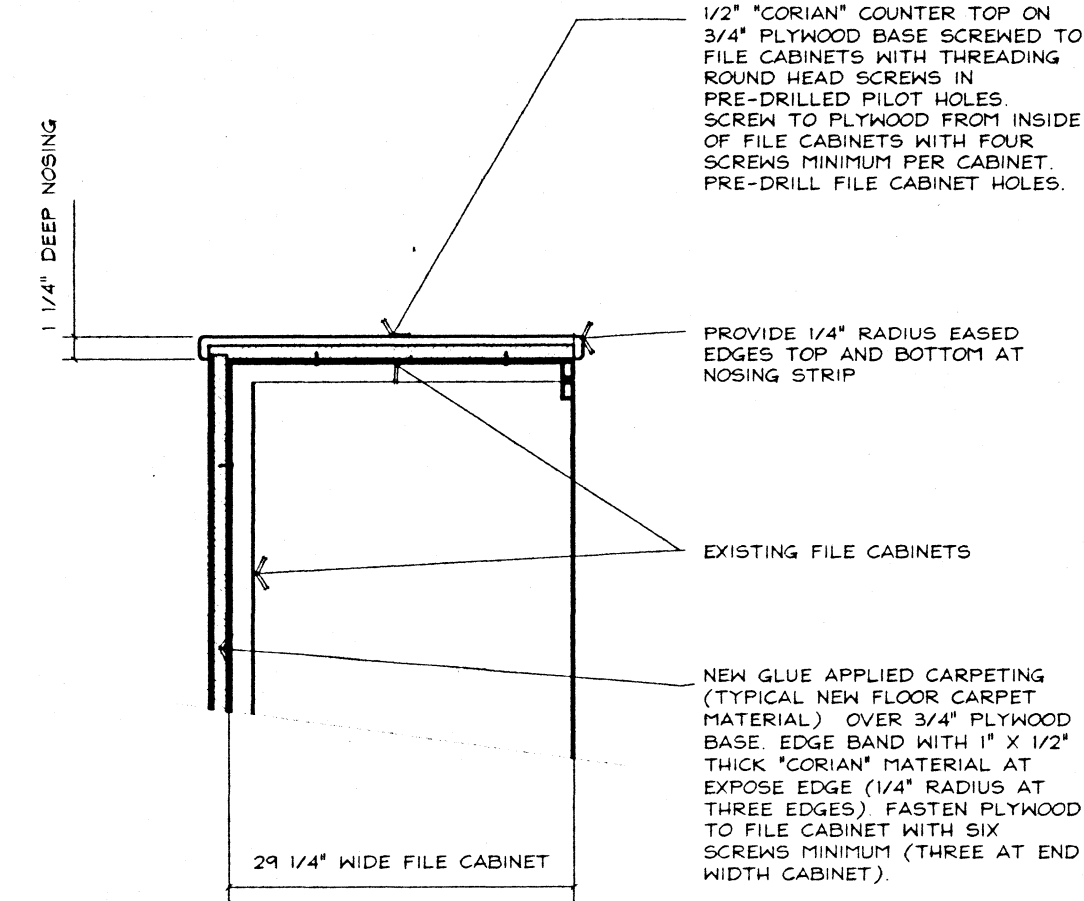


ENTRY COUNTER
1" = 1'-0"

4.1

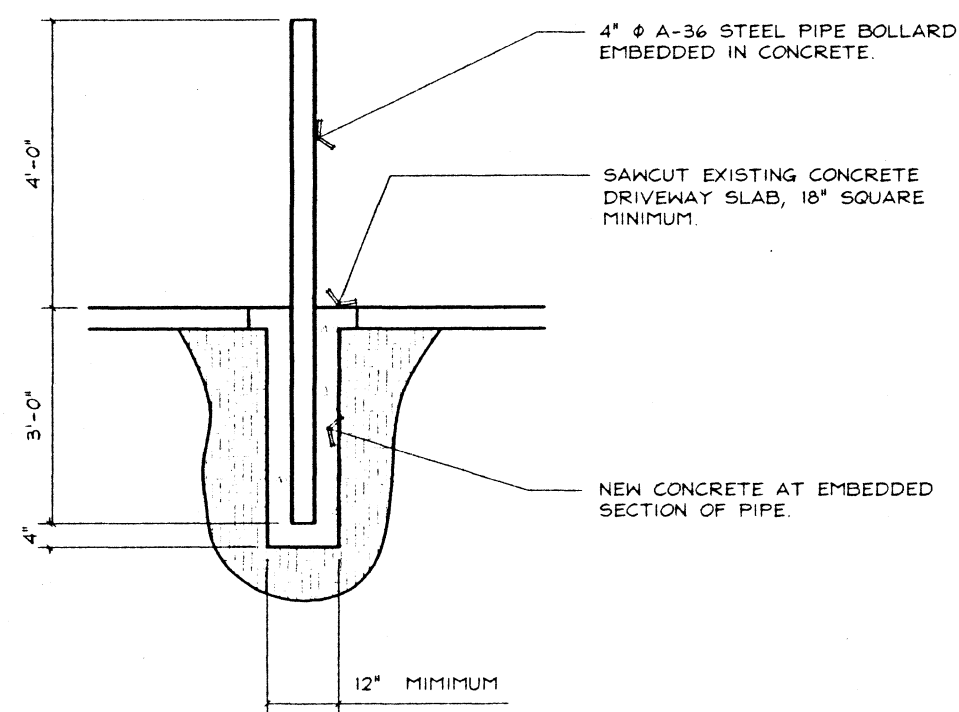


BOLLARD DETAIL
3/8" = 1'-0"

4.2

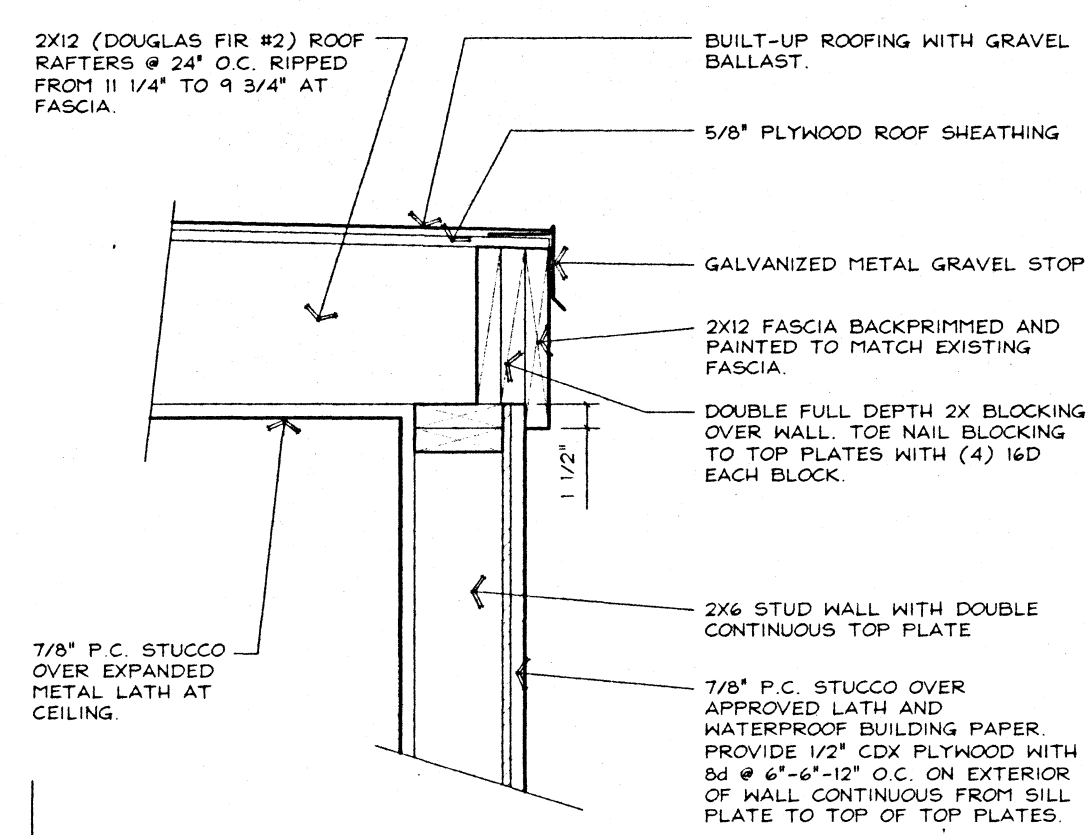


FASCIA AT WEATHER WALL
1" = 1'-0"

3.1

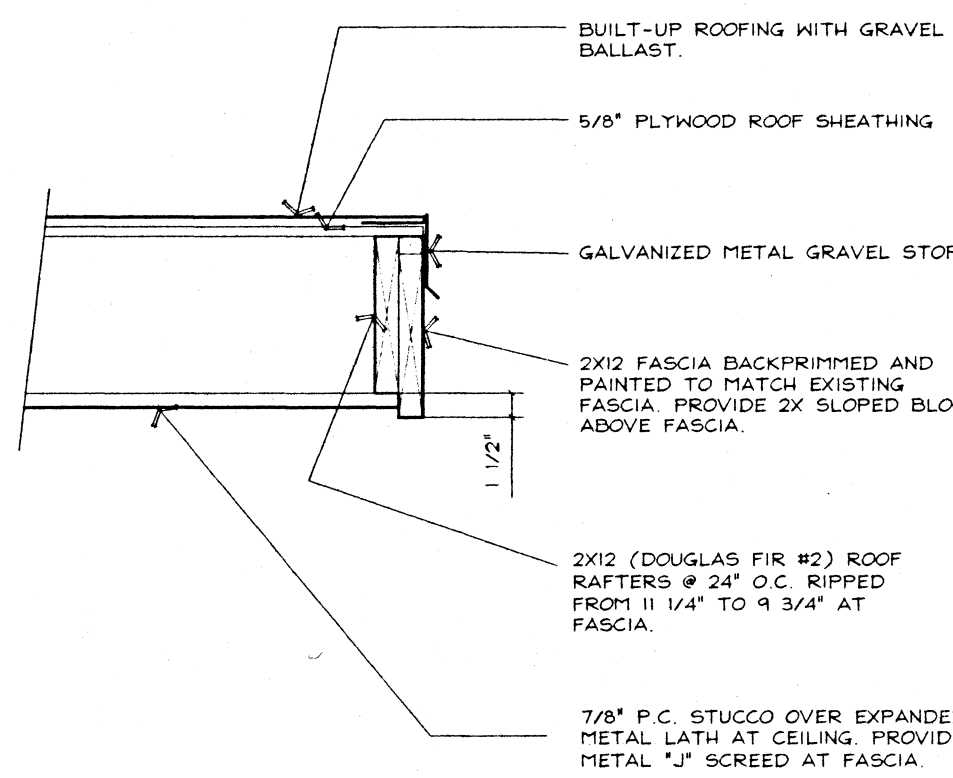


FASCIA
1" = 1'-0"

3.2

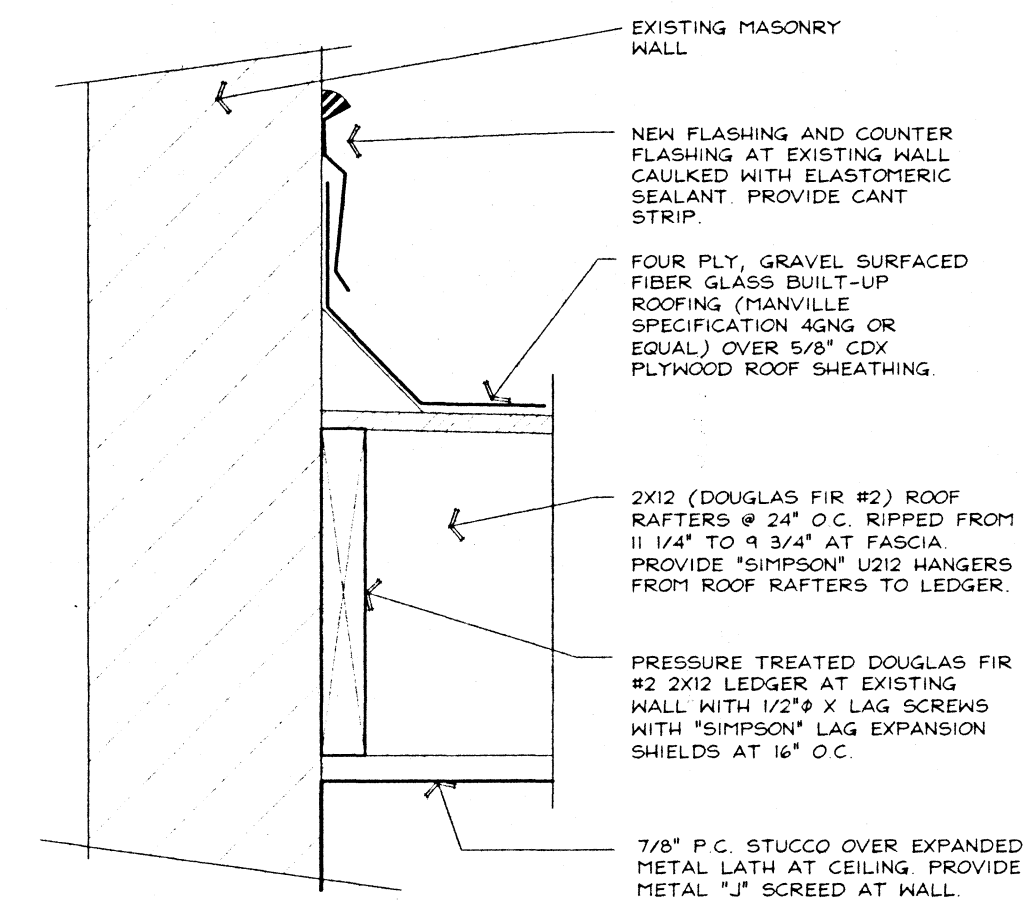


ROOF / EXISTING WALL
1" = 1'-0"

3.3

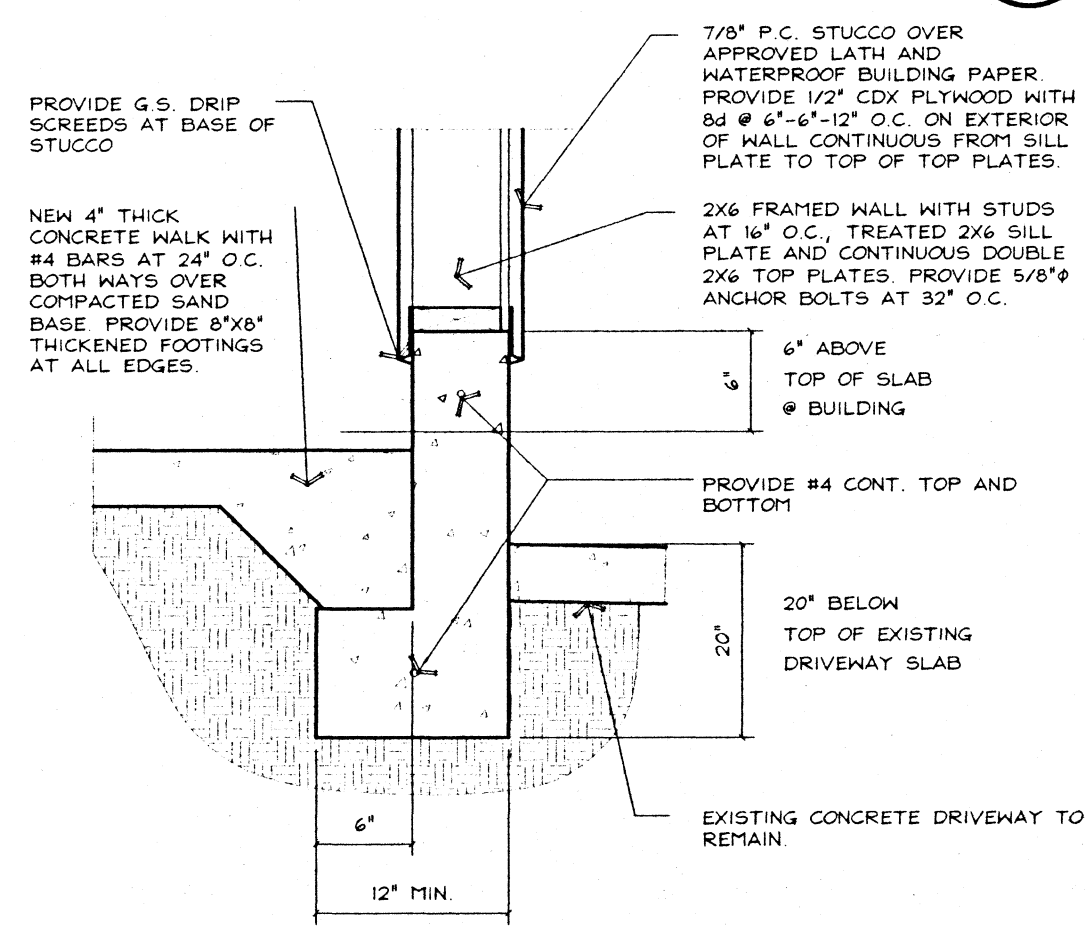


FOOTING
1" = 1'-0"

3.4

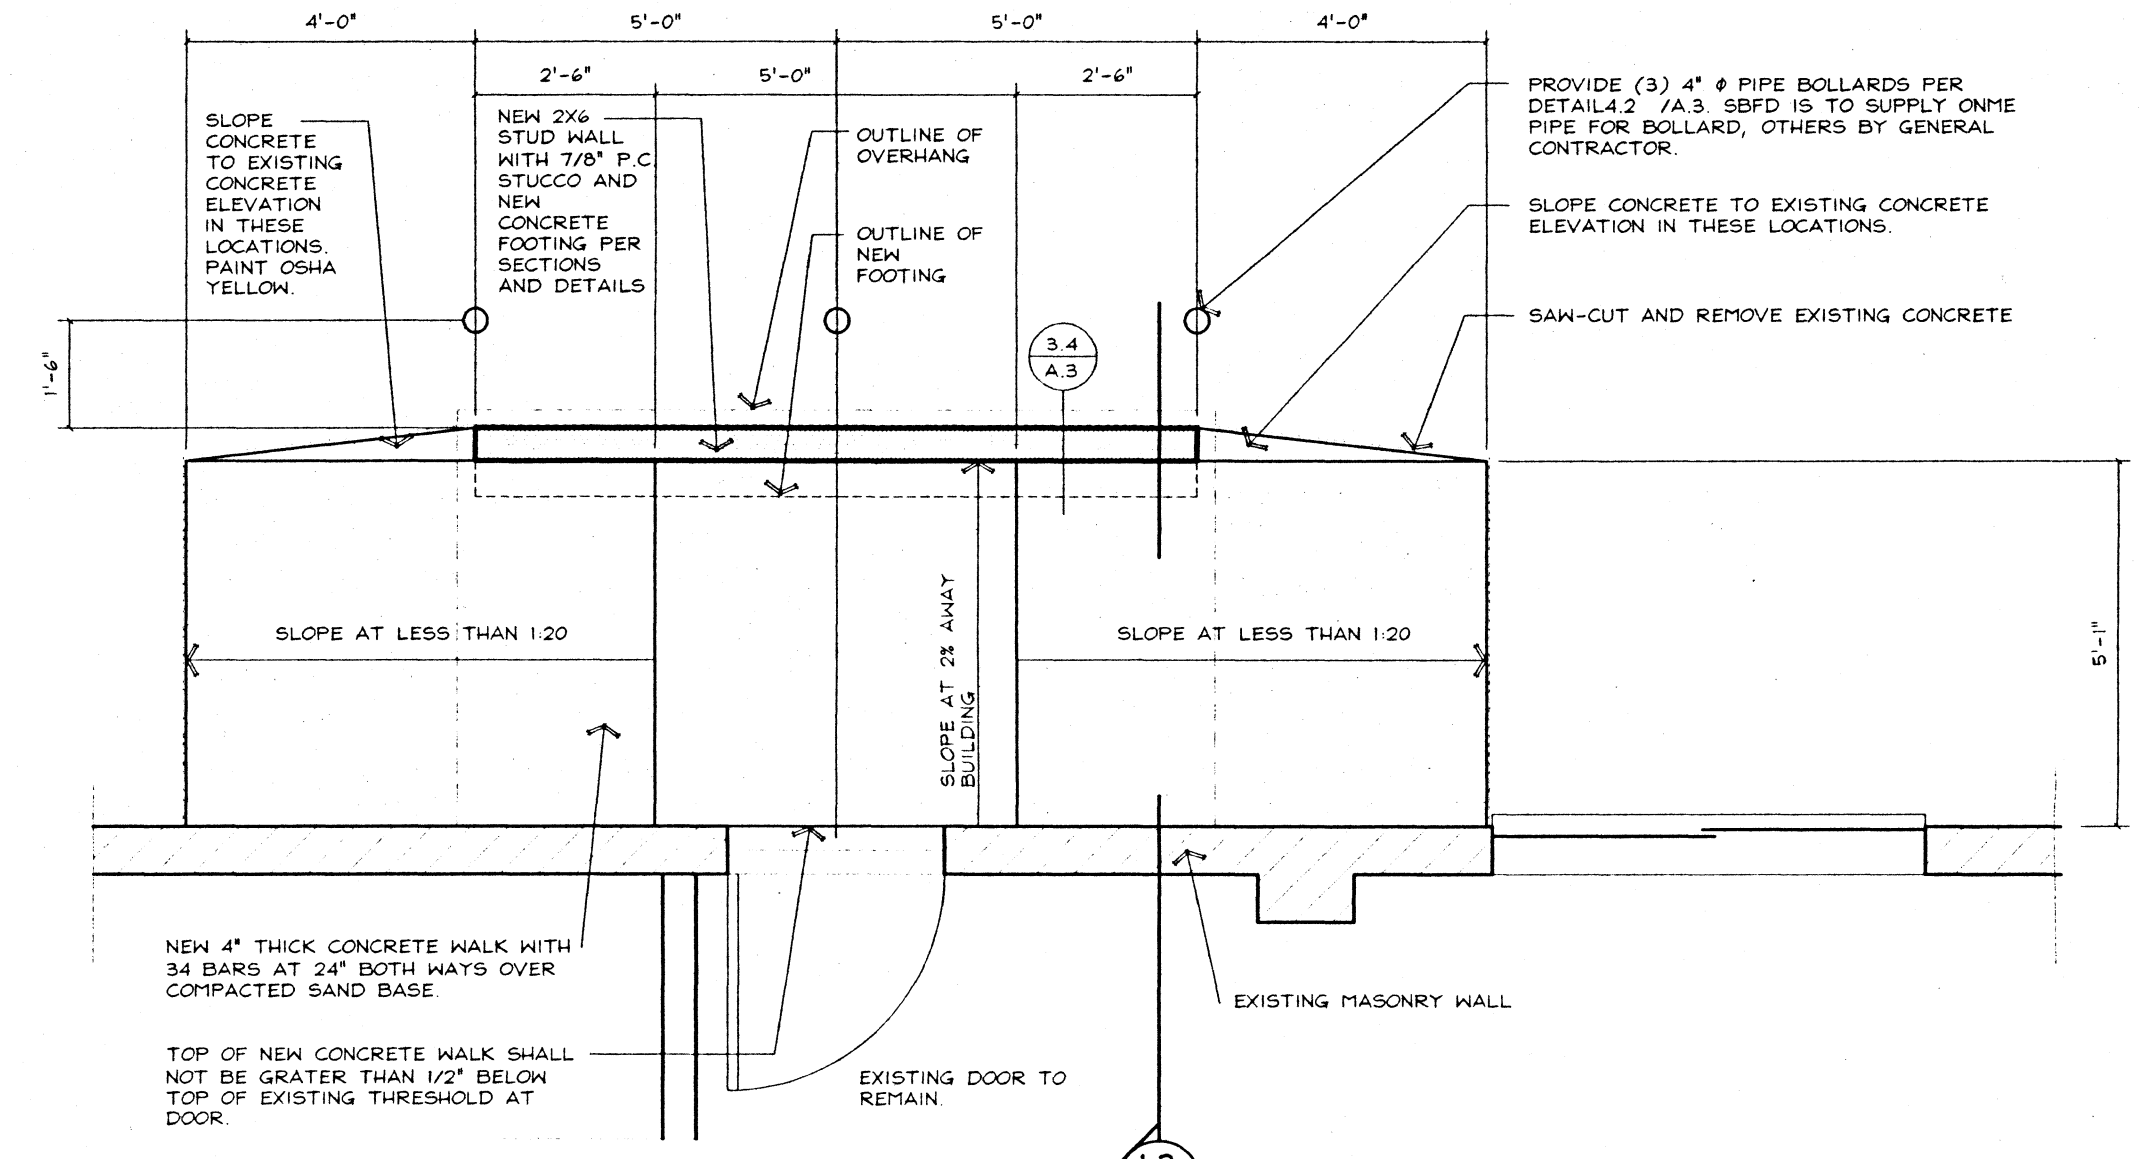


WEATHER WALL PLAN
3/8" = 1'-0"

1.2

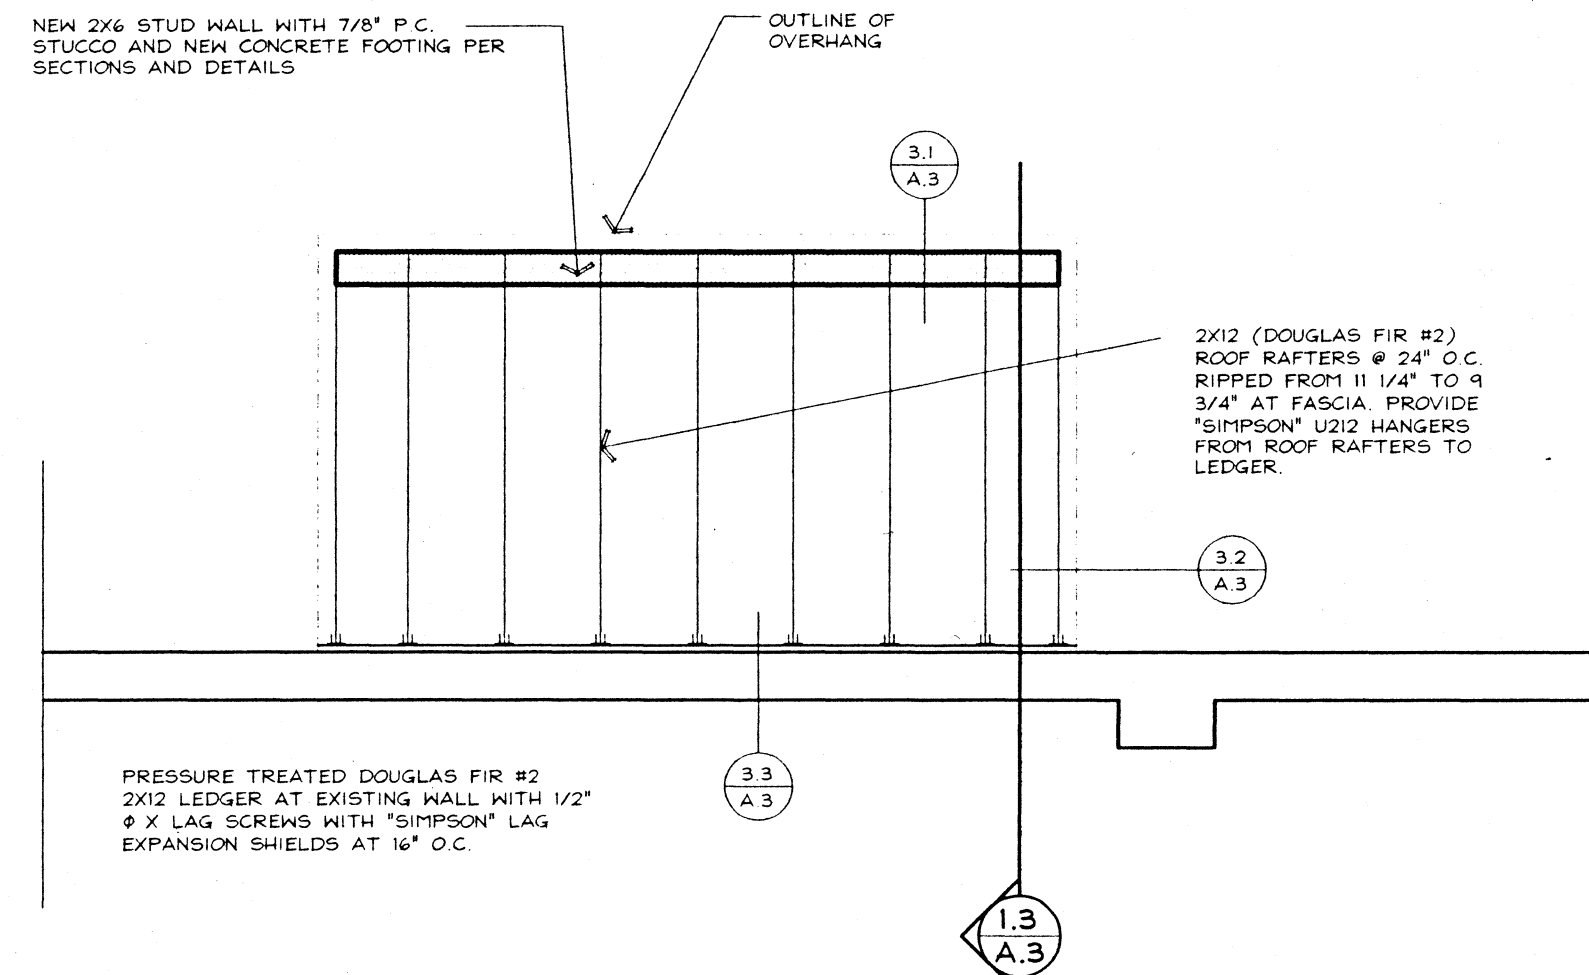

WEATHER WALL FRAMING
3/8" = 1'-0"

1.3

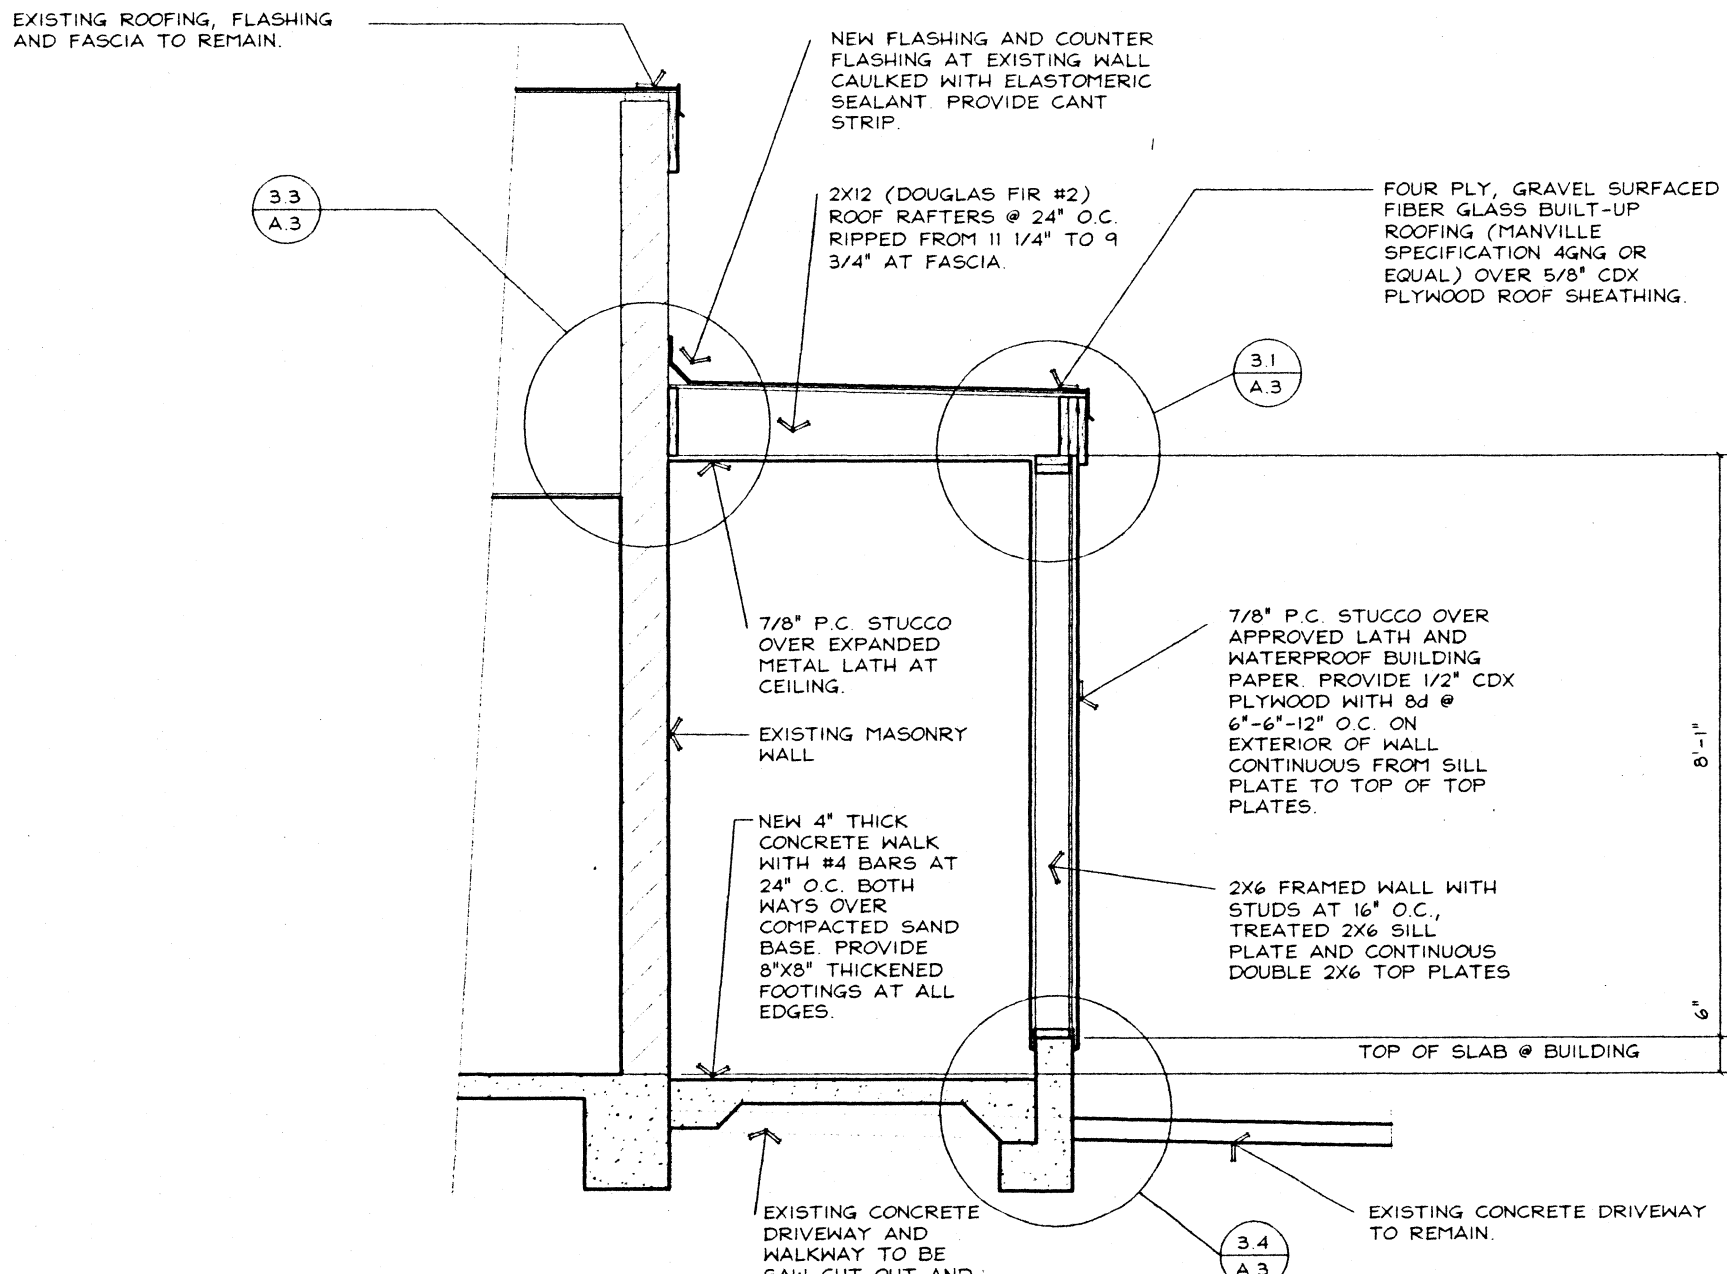

WEATHER WALL SECTION
3/8" = 1'-0"

1.4

TR
THOMAS REAY
ARCHITECT
780 CAUDILL STREET
SAN LUIS OBISPO
CALIFORNIA 93401
(805) 545-8435



PROJECT:
**SOUTH BAY
FIRE DEPARTMENT
FIRE STATION
IMPROVEMENTS**
2315 BAYVIEW HEIGHTS DRIVE
LOS OSOS, CALIFORNIA

**BRUCE PICKENS
FIRE CHIEF**

CONTACT
JOHN FORSBERG
PROJECT COORDINATOR

**LOS OSOS
COMMUNITY
SERVICE
DISTRICT**
2315 BAYVIEW HEIGHTS DRIVE
LOS OSOS, CALIFORNIA
93402
805 / 528 - 1053

All designs and other information on these drawings are for use on this specific project and shall not be used otherwise without the expressed written permission of Thomas Reay, Architect.
Written dimensions on these drawings shall take precedence over scaled dimensions. Contractors shall verify and be responsible for all dimensions and conditions on the job and this office shall be notified in writing of any variations from the dimensions or conditions shown in these drawings.

PROJECT NUMBER: 9820
DATE: MARCH 1999
SHEET TITLE:
WIND WALL

SHEET NUMBER:

A.3